

FEATURES & BENEFITS

- High torsional stiffness
- Extraneous load resistance
- Compact size
- Large thru-hole

SPECIFICATIONS

ACCURACY – (MAX ERROR)		
Nonlinearity – %FS		±0.1
Hysteresis – %FS		±0.25
Non-repeatability – %RO		±0.05
TEMPERATURE		
Effect on Output – % / °F – MAX		±0.002
Effect on Zero – %RO / °F – MAX		±0.002
Compensated Range	°F	+75 to +175
	°C	+24 to +80
Operating Range	°F	-65 to +225
	°C	-54 to +107
ELECTRICAL		
Rated Output – mV/V (Nominal)	60 - 6K lbf-in	1.0
	6.78 - 678 Nm	
	10K - 100K lbf-in	
	1.13K - 11.3K Nm	
Bridge Resistance – Ohm (Nominal)	60 - 1.2K lbf-in	350
	6.78 - 136 Nm	
	3K - 100K lbf-in	700
	339 - 11.3K Nm	
Excitation Voltage – VDC MAX		10
MECHANICAL		
Calibration		CW & CCW
Safe Overload – %CAP		200
Material	60 - 120 lbf-in	Aluminum
	6.78 - 13.6 Nm	
	240 - 100K lbf-in	Stainless steel
	27.1 - 11.3K Nm	


STANDARD CONFIGURATION



MODEL 5330 (Shown)

PERFORMANCE PARAMETERS

CAPACITY		MAX THRUST LOAD		MAX BENDING MOMENT	
lbf-in	Nm	lbf	N	lbf-in	Nm
60	6.78	100	445	50	5.65
120	13.6	120	534	60	6.78
240	27.1	240	1.07K	120	13.6
600	67.8	600	2.67K	300	33.9
1.2K	136	1.2K	5.34K	600	67.8
3K	339	3K	13.3K	1.5K	169
6K	678	6K	26.7K	3K	339
10K	1.13K	2.5K	11.1K	2.25K	254
20K	2.26K	5K	22.2K	4.5K	508
50K	5.65K	10K	44.5K	10K	1.13K
100K	11.3K	20K	89K	20K	2.26K

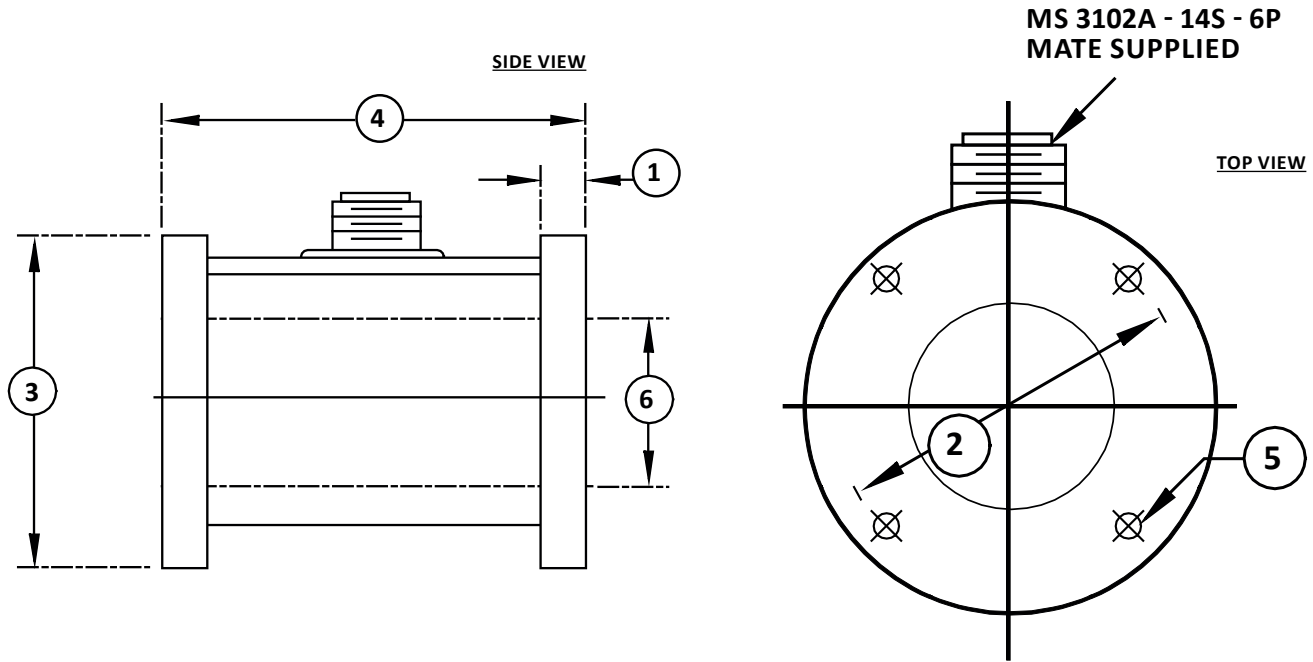

DIMENSIONS

See Drawing	CAPACITY									
	U.S. (lbf-in)	Metric (Nm)	U.S. (lbf-in)	Metric (Nm)	U.S. (lbf-in)	Metric (Nm)	U.S. (lbf-in)	Metric (Nm)	U.S. (lbf-in)	Metric (Nm)
	60, 120, 240	6.78, 13.6, 17.1	600, 1200	67.8, 136	3K, 6K	339, 678	10K, 20K	1.13K, 2.26K	50K, 100K	5.65K, 11.3K
	in	mm	in	mm	in	mm	in	mm	in	mm
(1)	0.3125	7.938	0.3125	7.938	0.3125	7.938	0.625	15.88	0.625	15.88
(2)	2.0	50.8	2.5	63.5	3.375	85.73	4.375	111.13	7.00	177.8
(3)	2.5	63.5	3.25	82.6	4.0	101.6	5.0	127.0	8.5	215.9
(4)	2.125	53.98	2.125	53.98	2.125	53.98	3.5	88.9	3.5	88.9
(5)	0.203 THRU 2 places	5.16 THRU 2 places	0.39 THRU 2 places	9.9 THRU 2 places	0.406 THRU 4 places	10.31 THRU 4 places	3/8 - 24 UNF 6 places		0.63 THRU 8 places	16.0 THRU 8 places
(6)	0.875 THRU	22.23 THRU	1.375 THRU	34.93 THRU	2.375 THRU	60.33 THRU	3.375 THRU	85.73 THRU	3.375 THRU	85.73 THRU

Notes:
 - Error due to bending <1% FS at maximum allowable bending load.
 - Allowable loads cannot be applied simultaneously